


Digital Compact Scale

# HL-i

Series

*HL-i series compact design makes it highly suitable for weighing applications at work, school, home or anywhere*

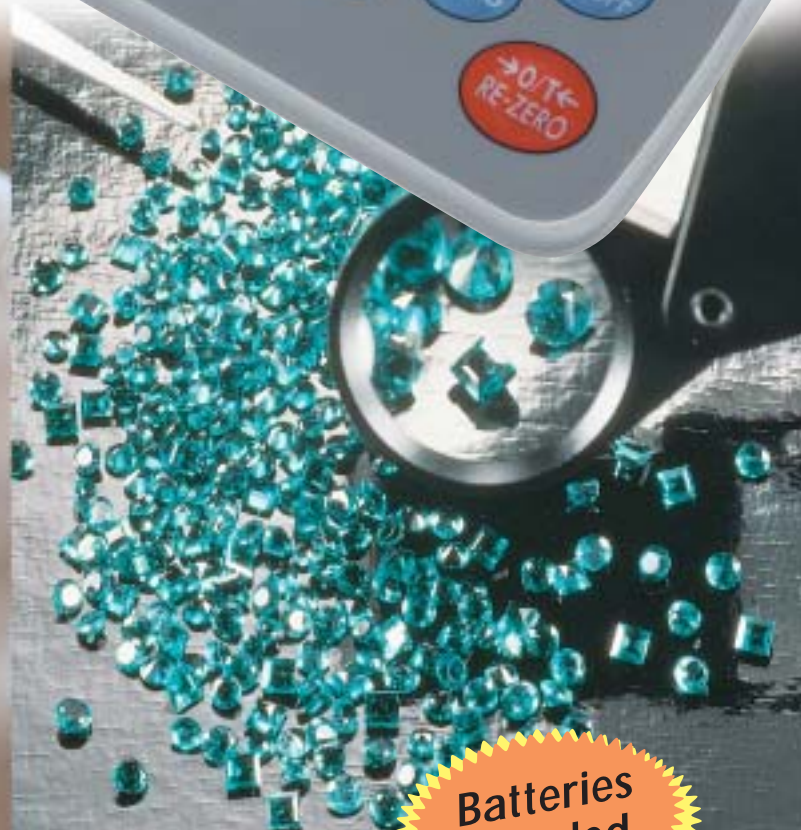

**Batteries  
Included**



**A&D** ...Clearly a Better Value

## // High Weighing Resolution of 1/2000

Precision weighing of 200g x 0.1g for HL-200i and 2000g x 1g for HL-2000i

## // Calibration Function

Easy and simple to calibrate the scale with external calibration mass for accurate weighing

## // Multi Weighing Units

Meet any weighing application with weighing units of g, oz, ct and tael for HL-200i and g, oz, lb-oz and teal for HL-2000i

## // Two Way Power

Use either 4 x AA batteries or the optional AC adapter

## // Long Battery Life

Continuous operation for 1000 hours using alkaline batteries

## // Tare Function to Full Weighing Capacity

One touch tare using the "RE-ZERO" key enables the user to use a weighing container and still benefit from the full weighing range of the scale!

## // Large LCD Display

Easy to read 13.5mm LCD display

## // Large Weighing Pan

Easily weigh large objects on the 130mm diameter weighing pan

## // Auto Power Off Function

Save battery life with the Auto Power Off function. HL-i automatically shuts down after 5 minutes of disuse

## // Low Battery Indication

Low battery warning is displayed when the batteries are running low

## // Overload Indication

Display indicator for scale overload conditions

## // Stable Indicator

Lets you know when the scale is stable and ready to weigh ensuring accurate weighing results

## // Compact Size

Small size means it's easy to use anywhere. The scale can also be stored on its side or rear, saving space!

### HL-i Series Specifications

	HL-200i	HL-2000i
Capacity x Resolution	200g x 0.1 g	2000 g x 1 g
	7.05 oz x 0.01 oz	70.5 oz x 0.1 oz
	1000.0 ct x 0.5 ct	4 lb 6.6 oz x 0.1 oz
	5.335 tl x 0.005 tl *	53.35 tl x 0.05 tl *
Non-linearity	±0.2g	±2g
Repeatability	0.1g	1g
Span drift	±0.015% / °C TYP (5°C~35°C / 41°F~95°F)	
Operating temp.	- 10°C~40°C / 14°F~104°F, Less than 85%RH	
Display	13.5 mm / 0.53 in., 7segment liquid crystal display	
Display update	Approximately 5 times per second	
Power	4 x "AA" size batteries or AC adapter	
Battery life	Approximately 1000 hours with alkaline cells at 20°C / 68°F	
Pan size	130mm / 5.1in.	
Dimensions	130(W)x192(D)x51(H)mm / 5.1(W)x7.6(D)x2.0(H)in.	
Weight	Approximately 500g / 1.1lb	
Calibration weight	200g	2000g
Option	AC adapter	

\* tl : Taiwan tael

### Options

AX-TB-196 AC100V with A plug  
 AX-TB-202 AC120V with A plug  
 AX-TB-164 AC220-230V with C plug  
 AX-TB-173 AC220-230V with BF plug  
 AX-TB-172 AC220-240V with S plug



# Nin★JA

New Innovative Novel Japanese Apparatus

**AND** ...Clearly a Better Value